

## Revelator 8" Woofer



Type Number: 22W/8851T00

### Features:

The Revelator series has for years been celebrated for producing the best sounding electro dynamic transducers in the world. Since ScanSpeak was founded in 1970, the audio engineers and R&D experts working on the line have been on a quest to create drivers that reveal all the sound in recordings, hiding nothing from the listener. This quest has resulted in several revolutionary inventions that remove distortion in the magnet systems and in the moving parts of the speaker. The philosophy is that the sound has to be very dynamic, giving a perfect transient response and providing tonal balance.

The latest generation of the Revelator woofers incorporates a new aluminum cone design, resulting in an impressive transient response. The output is incredibly natural sounding bass that challenges the listener to tell the difference between the real thing and its reproduction.

Driver Highlights: Low loss linear suspension, SD-1 motor system, hard paper cone



### Specs:

#### Electrical Data

|                       |      |      |     |
|-----------------------|------|------|-----|
| Nominal impedance     | Zn   | 8    | ohm |
| Minimum impedance     | Zmin | --   | ohm |
| Maximum impedance     | Zo   | --   | ohm |
| DC resistance         | Re   | 6.2  | ohm |
| Voice coil inductance | Le   | 0.35 | mH  |

#### T-S Parameters

|                         |     |      |                 |
|-------------------------|-----|------|-----------------|
| Resonance Frequency     | fs  | 21   | Hz              |
| Mechanical Q factor     | Qms | 5.1  |                 |
| Electrical Q factor     | Qes | 0.26 |                 |
| Total Q factor          | Qts | 0.25 |                 |
| Force factor            | Bl  | 9.9  | Tm              |
| Mechanical resistance   | Rms | 0.8  | Kg/s            |
| Moving mass             | Mms | 31   | g               |
| Suspension compliance   | Cms | --   | mm/N            |
| Effective cone diameter | D   | --   | cm              |
| Effective piston area   | Sd  | 220  | cm <sup>2</sup> |
| Equivalent volume       | Vas | 127  | ltrs            |
| Sensitivity (2.83V/1m)  |     | 88   | dB              |
| Ratio BL/√(Re)          |     | --   |                 |
| Ratio fs/Qts            | F   | --   |                 |

#### Power handling


|                                 |     |      |
|---------------------------------|-----|------|
| 100h RMS noise test (IEC)       | 170 | W    |
| Long-term Max Power (IEC 18.3)  | --  | W    |
| Max linear SPL (rms) @ power    | --  | dB/W |
| Short Term Max power (IEC 18.2) | --  | W    |

#### Voice Coil and Magnet Parameters

|                         |    |     |
|-------------------------|----|-----|
| Voice coil diameter     | 50 | mm  |
| Voice coil height       | -- | mm  |
| Voice coil layers       | -- |     |
| Height of the gap       | -- | mm  |
| Linear excursion +/-    | 9  | mm  |
| Max mech. excursion +/- | 14 | mm  |
| Flux density of gap     | -- | mWb |
| Total useful flux       | -- | mWb |
| Diameter of magnet      | -- | mm  |
| Height of magnet        | -- | mm  |
| Weight of magnet        | -- | Kg  |

Notes:  
IEC specs refer to IEC 60268-5 third edition.  
All Tymphany products are RoHS compliant.

Frequency: 22W/8851T00

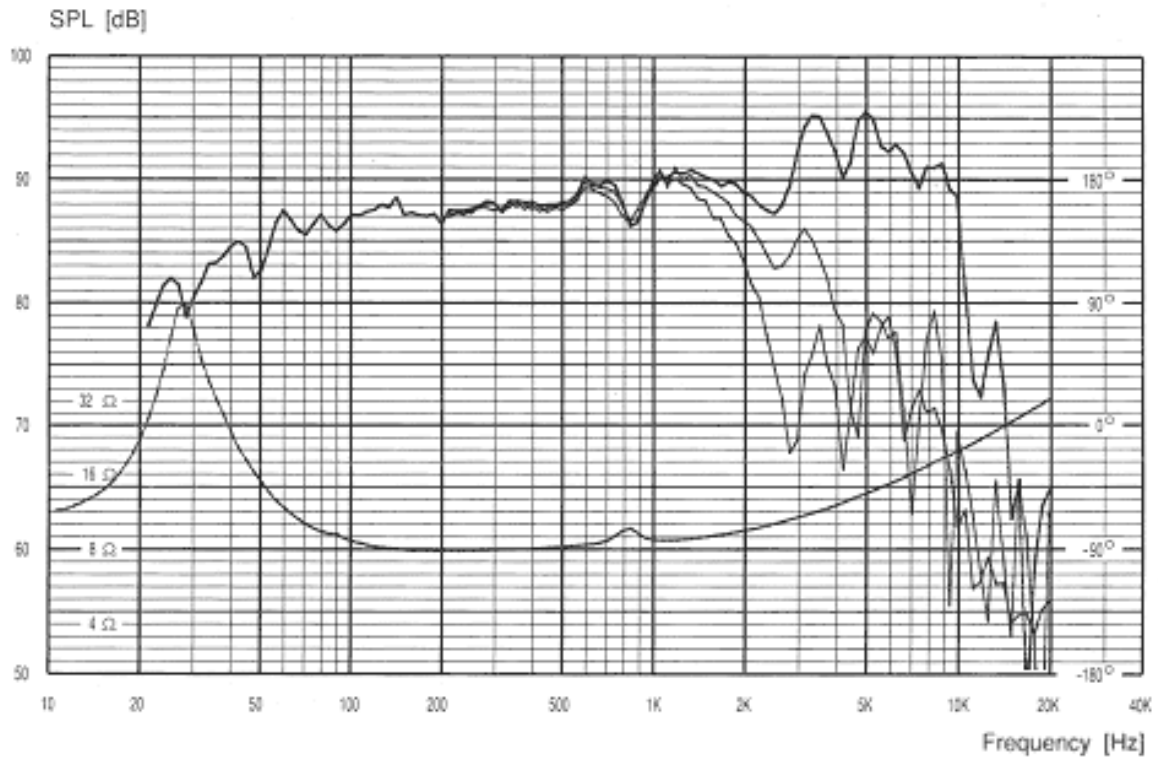

Mechanical Dimensions: 22W/8851T00

